


Excavator Mounted MOVAX - With Rubber Wheels

Borehole Information



Project Location	Iron Mountain, Canning Town
Contract E Number	E3732A
Type of Project	Document recycling depot
Client	Owl Projects, on behalf of Iron Mountain
Duration of Work	2 Weeks
Piling Works	April 2012
Purpose of Piling	Temporary cofferdam for Footing Construction
Type of Pile	GU8N Pile @ 6.5m
Piling Machine	MOVAX with minimum vibration side grip
Particulars	Due to the restricted headroom, within a warehouse, a Movax, with rubber wheels, was used, utilising it's ability to side grip the piles into position before using vibration to push the piles in.

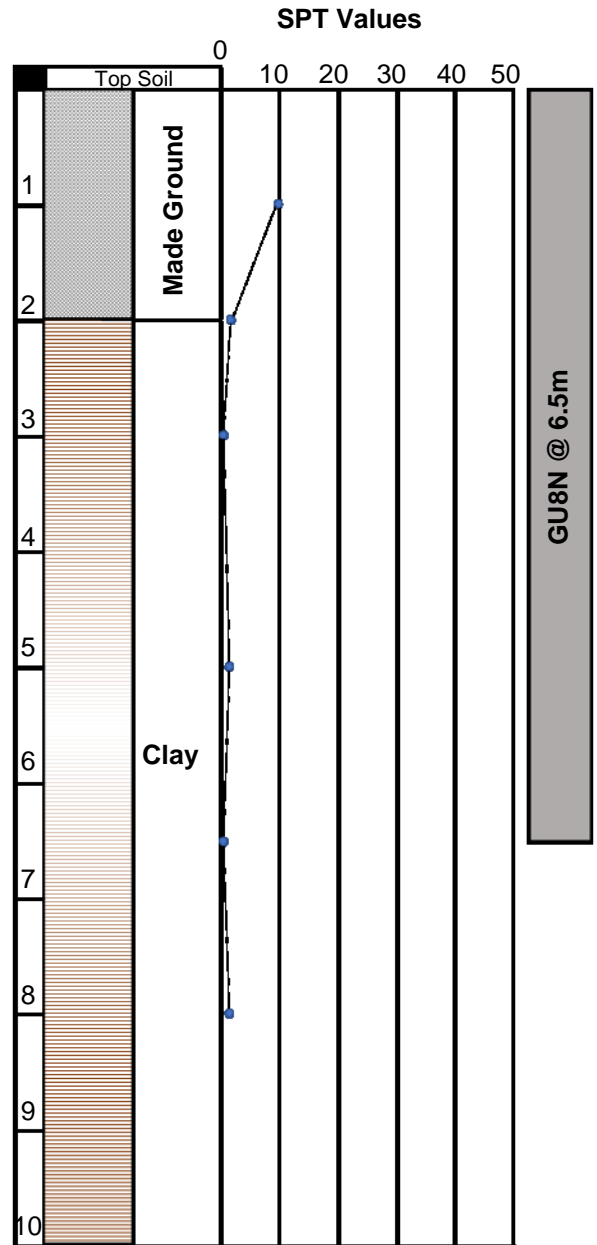

Sheet Piling, Construction
& Professional Design
Services

Unit 7,
The Oaks Business Village
Revenge Road,
Lordswood,
Kent,
ME5 8LF

TEL: 01622 794460
Enquiries@berryrange.com
www.berryrange.com

