


Pre-Augering & WP150 Piler with Water Lubrication



Borehole Information

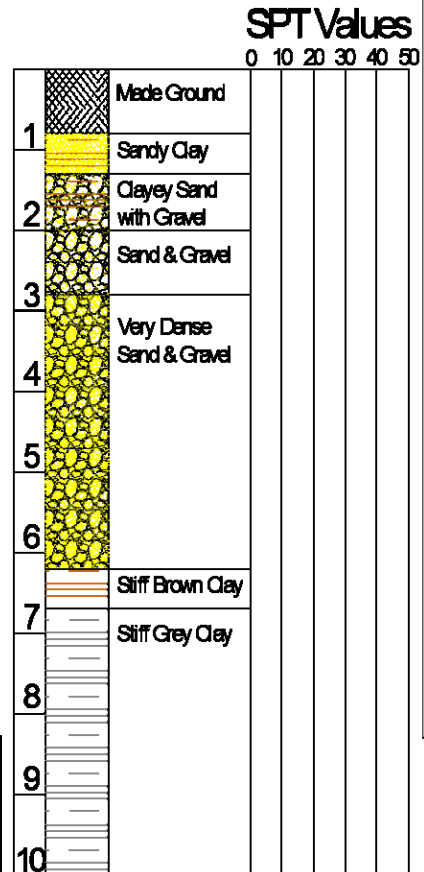

U Sheet Pile = PU22-1 @ 9.5m Long

Project Location	Eleanor Street Shaft, Bromley-By-Bow
Contract E Number	E4238A
Type of Project	CROSSRAIL—Shaft Works
Client	Joseph Gallagher Limited
Duration of Work	3 Weeks
Piling Works	March 2013 - April 2013
Purpose of Piling	Commencement of 30m deep shaft
Type of Pile	U Steel Sheet Pile, PU22-1 L=9.5m
Piling System	Press-In with Water Lubrication, (pre-augered)
Piling Machine	WP150
Particulars	Silent Piling Method required Vibration & Noise Sensitive area & between LUL & Network Rail Viaducts



Sheet Piling, Construction & Professional Design Services

Unit 7,
The Oaks Business Village
Revenge Road,
Lordswood,
Kent,
ME5 8LF

TEL: 01622 794460
Enquiries@berryrange.com
www.berryrange.com

