



Conventional Pile Installation with Crane Suspended Vibro-Hammer

Borehole Information

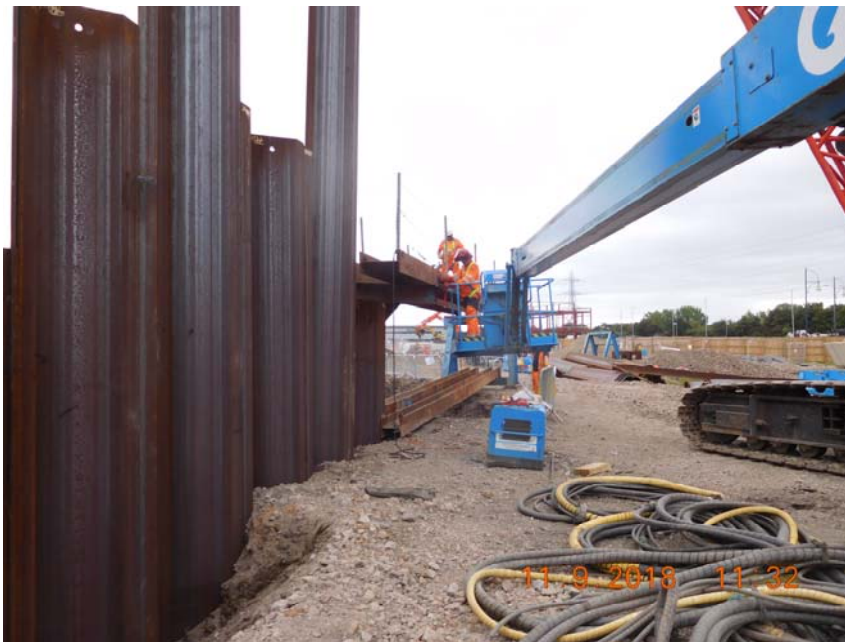

Project Location	Fresh Wharf Road, Barking
Contract E Number	E5046A
Type of Project	Flood Defence Works
Client	Erith
Duration of Work	- 7 Weeks - 4 Weeks
Piling Works	- February 2019 - March 2019 - July 2019 - August 2019
Purpose of Piling	Replace existing Quay wall
Type of Pile	AZ18-700 @ 11.0m Long
Piling Machine	Crane Suspended Vibratory Hammer
Particulars	New Quay wall & mooring bollards with fenders for boats

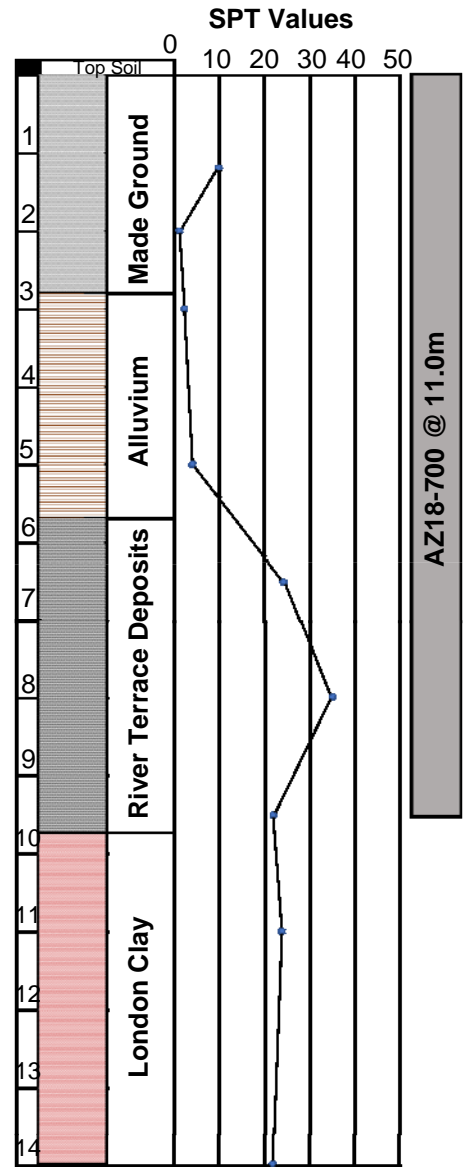

Sheet Piling, Construction
& Professional Design
Services

Unit 7,
The Oaks Business Village
Revenge Road,
Lordswood,
Kent,
ME5 8LF

TEL: 01622 794460
Enquiries@berryrange.com
www.berryrange.com

